

T500RX-SIGCAP

DRTI-Compatible IF Recorder

The T500RX-SIGCAP® is a low profile, ruggedized, and highly capable recording system that is ideally suited for signal capture in tactical environments. Plug-in compatible with both fielded and next generation 10 GbE DRTi receiving and tuning systems, the T500RX-SIGCAP enables expansion to a high density collection system with future-proof interface compatibility. The T500RX-SIGCAP records up to four simultaneous signals onto removable Solid State Drive (SSD) media.

High Performance Open Architecture


Hosted on an open systems COTS server with open file systems, the T500RX-SIGCAP maximizes use of commercially available components to provide high performance, turn-key system integration with simple file transfer. The system supports simultaneous recording and playback and provides 4TB of storage in the base configuration. Additional storage capacity is achievable in alternate configurations.

Able to Migrate to New Interfaces

The T500RX-SIGCAP can house both legacy and next generation interfaces within the same chassis. The user can simply plug in the cabling for the interface you wish to use.

Specifications

- Up to Four DRTi Digital IF Channels:
 - DRTi DIM1A/1B ECL
 - 10GbE Fiber-Optic
- Storage:
 - 4TB SSD
 - User removable/swappable storage
 - 5 channel-hours recording capacity
- Performance:
 - Sustained 2.4 Gbps per channel data rates
 - 1 or 10 GbE network ports for off-line data transfer
 - Reliability and Maintainability:
 - Redundant, user replaceable fans and power supplies
- Size, Weight:
 - 1U 20" depth less than 30 lbs.
- Environmental:
 - 5 to 50°C Operating
 - -40 to 65 °C non-Operating
 - 5 to 95% humidity non-condensing
 - 33 dBA, no prominent tones at 25 °C ambient temp
- Power:
 - 100-240VAC auto-ranging, 50/60 Hz
 - 80 PLUS
- Ruggedized Chassis:
 - MIL-STD-810G Compliant

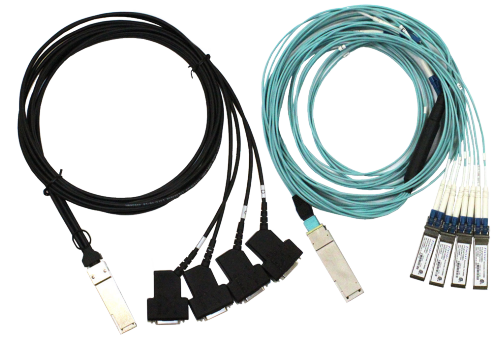

Key Features

- ✓ Seamless drop-in replacement for End-of-Life recorders
- ✓ Supports current DRTi DIM 1A/1B digital IF interface with smaller, lightweight cabling option
- ✓ Field upgradable to future 10GbE digital IF interface
- ✓ Simultaneous record and playback
- ✓ 2 or 4 channel configuration in low-profile 1U chassis
- ✓ Consistent UI for all interfaces
- ✓ World-wide maintenance support
- ✓ Part of a larger product line with a wide range of channels count and storage options

SPECIFICATIONS AND FEATURES SUBJECT TO CHANGE.